



SCHOTT® DentalGlass | Inert

Materials Data

Designed to increase the mechanical strength and durability of your final composite, all SCHOTT inert dental glasses are ideal fillers for dental materials. Due to their composition, these special glass materials show very low reactivity (“inert”).

Advantages

SCHOTT® UltraFine: A patented processing technology

The contamination-free grinding down to particle sizes of only 0.4 µm (d₅₀) ensures:

- Excellent polishability, high load factors
- High transparency of the composite

Expertise in special glass technology

The tightly controlled composition of our glasses ensures consistent physical and chemical properties. The composition of our range of inert dental glasses has been optimized to meet the following criteria:

- Refractive index exactly matched to the most commonly used dental resins, varying from 1.50 to 1.60
- A choice of barium- or strontium-based glasses with radiopacity between 210 and 400% (according to ISO 4049, analogue measurement)
- Low fluoride content as an option



Materials Data:

Barium glasses


		G018-186	8235	G018-053	GM27884	GM39923
Expansion coefficient (-30/+70 °C)	10 ⁻⁶ /K	5	5	5	4	5
Index of refraction n _d		1.55	1.55	1.53	1.53	1.52
Density	g/cm ³	3.0	3.0	2.9	2.8	2.8
Transformation temperature (ISO 7884-8)	°C	595	680	595	665	590
Radiopacity (acc. ISO 4049) as thickness of aluminium equal to 2-mm thick glass material	mm	5.4 (270%)	4.8 (240%)	4.8 (240%)	4.2 (210%)	4.2 (210%)
Hydrolytical resistance (DIN ISO 719)		Class 1	Class 1	Class 1	Class 1	Class 1
Composition (approx. values) [weight-%]	SiO ₂	45	50	50	55	55
	BaO	35	30	30	25	25
	B ₂ O ₃	10	10	10	10	10
	Al ₂ O ₃	10	10	10	10	10
	F	2	-	2	-	2
Young's Modulus	GPa	77	75	72	71	-

SCHOTT
glass made of ideas



SCHOTT® DentalGlass | Inert

Materials Data

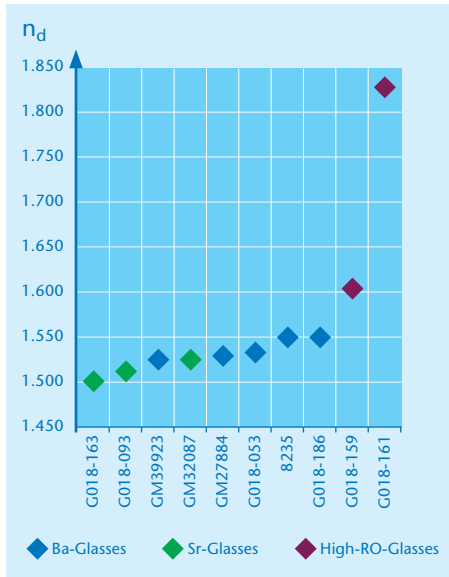

We offer two specially designed glasses for special applications where high radiopacity is essential. Your root-channel fillings or core build-up materials will be given suitable radiopacity. In addition your high refractive index resin mixtures might find the perfect filler among our glasses G018-161 and G018-159.

Strontium glasses

		GM32087	G018-093	G018-163
Expansion coefficient (-30/+70 °C)	10 ⁻⁶ /K	4	5	3
Index of refraction n _d		1.52	1.51	1.50
Density	g/cm ³	2.6	2.6	2.5
Transformation temperature (ISO7884-8)	°C	680	610	610
Radiopacity (acc.ISO 4049) as thickness of aluminium equal to 2-mm thick glass material	mm	4.2 (210%)	4.2 (210%)	Approx. 4 (200%)
Hydrolytical resistance (DIN ISO 719)		Class 1	Class 1	Class 1
Composition (approx. values) [weight-%]	SiO ₂	50	50	60
	SrO	20	20	15
	BaO	1	1	-
	B ₂ O ₃	15	15	15
	Al ₂ O ₃	15	15	15
	F	-	2	2
Young's Modulus	GPa	72	-	-

High Radio Opaque Glasses

		G018-161	G018-159
Expansion coefficient (-30/+70 °C)	10 ⁻⁶ /K	6	8
Index of refraction n _d	10 ⁻⁶ /K	1.83	1.60
Density	g/cm ³	4.6	3.4
Transformation temperature (ISO7884-8)	°C	585	530
Radiopacity (acc.ISO 4049) as thickness of aluminium equal to 2-mm thick glass material	mm	Approx. 8 (400%)	Approx. 6 (300%)
Hydrolytical resistance (DIN ISO 719)		T.b.d.*	T.b.d.*
Composition (approx. values) [weight-%]	SiO ₂	5	30
	TiO ₂	< 5	-
	ZrO ₂	< 5	10
	CaO	-	5
	ZnO	20	10
	SrO	-	25
	B ₂ O ₃	20	5
	Al ₂ O ₃	-	5
	Nb ₂ O ₅	10	-
	La ₂ O ₃	35	5
	Na ₂ O	-	5
	WO ₃	5	-
	F	-	2
Young's Modulus	GPa	111	-

For more information:

Special Glass Division of
SCHOTT Electronic Packaging GmbH
 Christoph-Dorner-Strasse 29
 84028 Landshut
 Germany

Phone: +49 (0)871/826-702
 Fax: +49 (0)3641/28889-096
 Sandra.Blomer@schott.com
 www.schott.com/epackaging

SCHOTT
 glass made of ideas

70061 ENGLISH 07100.3 all/jab Printed in Germany
 No responsibility can be taken for the accuracy of this information. Despite the fact that all reasonable care was taken in presenting and keeping this information up to date, SCHOTT neither accepts legal responsibilities nor guarantees the completeness, accuracy and up-to-dateness of the information presented here. Date issued: June 2010